



Marker Paint 360° (V403)

This product can be used in all position thanks to its special 360° valve. This spray is ideal for professional uses on surfaces such as asphalts and walls, but also for domestic DIY projects. Available in multiple colors.

360° MARKER PAINT - A spray paint for marking masonry, pavements, asphalt, cement and wood. It is resistant to weathering and wear. Available in multiple colors. This product comes with a special "360° valve," allowing it be used in any position.



Technical specifications:

Quantity	500 ml – Net Wt. 12.6 oz 360 g
Box / Case	12 Pieces
Aspect	Tin-Plate can containing under pressure fluid
Chemical nature	Synthetic modified resin
Color	fluo-pastel
Odor	Characteristic of solvent
Relative density	At 68°F 0.70÷ 0.74 g/ml
Writings on the bottom	Barcode, date of production, name of product
Flash point	Und. 0° F extremely flammable
Pressure	at 68°F 5.5 ± 0.5 bar
Pressure	At 122°F 8.0 ± 0.5 bar
Viscosity Ford Cup	From 28" to 33"
Dry residual in the can	From 30 to 35 %
Overcoating	anytime
Brillance	From 0 to 15 Gloss (60 ° angle gloss meter)
Operating temperature	14°F / +212°C (Peak 302°F)
safety cap child-proof patented	
The product is permanent and resistant to UV rays and humidity.	


Directive 2004/42/CE: C.O.V.
Under category: Special finishing
Limit value COV: 840 g/Liter
Max effective contents:640 g/Liter

FIELDS OF APPLICATION: Wood, metal, concrete, walls, asphalt.

HOW TO USE:

1. Open the cap:

Break the safety seal to open the cap.
Rotate the colored tongue that covers the trigger clockwise.

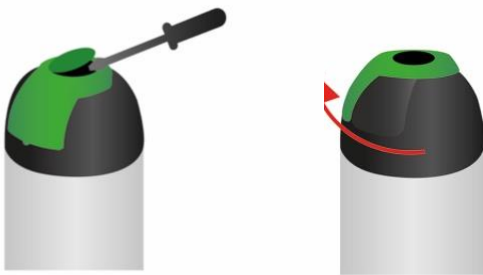

2. Shake vigorously for at least 1 minute, until you hear the inner marbles move freely. It is also suggested to occasionally shake the can during use.



3. Use the product:

Spray at any angle, from a distance of 4-10" inches.



4. Rotate the colored tab that protects the trigger counterclockwise



MODE OF STORAGE

Before using Stock the product in a dry location above 40°F degrees and below 113°F. After use, keep containers closed. In the original package, the product can be conserved for 24 months.

After the first use: conserve in a fresh and dry location, away from hot conditions. Keep out of reach of children.

This information, even if reliable, must be considered only approximate. We are not responsible for the wrong use of the product, or the violation of any license. Before

BEFORE USE, CONSULT THE SAFETY DATA SHEET OF THE PRODUCT