


PTFE Grease (G007)

This is another high performing grease from the Ambro-Sol lubricant line. It's smooth to the touch and resists high temperatures (up to 248°F). It is commonly used in steel, glass, ceramic, glass and brick industry to help prevent seizing.

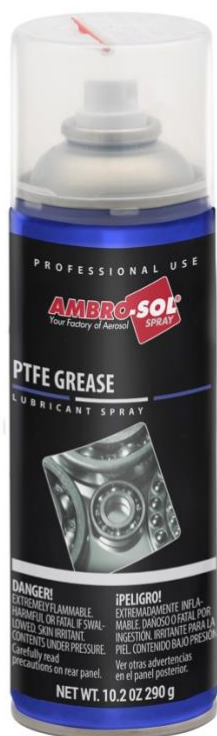

Quantity	400 ml – Net Wt. 10.2 oz 290 g
Barcode	EAN 13: 8034108890067
Case	12 pieces

PTFE GREASE – A High Quality grease that prevents corrosion and performs at high temperatures (up to 248°F) without leaving residue. It has a low friction coefficient and a high chemical inertia which makes it excellent for high load resistance and extreme operating conditions. It is commonly used on bearings, bushes, pistons, gears, chains, motors, cams and conveyor rollers in the steel, glass, ceramic and brick industries.

Technical Specifications:

Aspect	Cylinder containing under pressure fluid
Color	Beige
Odor	Characteristic of solvent
Relative density	68°F 0.69 ÷ 0.73 g/ml
Flash point	Low.32° F
Pressure at 68°F	4/6 bar
Consistency	NLGI EP2
Penetration at 77°F	265 - 295 (mm x 0,1)
Drip point	> 356°F
Application temperature	-22°F - + 248°F

HOW TO USE: Shake and spray directly on the parts to be treated. This product can also be used with the straw attached to the cap.

STORAGE

Before using: stock the product in a dry location above 32°F degrees and below 113°F. After use, keep containers closed. In the original package, the product can be conserved for 24 months.

After the first use: conserve in a fresh and dry location, away from hot conditions. Keep out of reach of children.

Hazards identification:

H222	Extremely flammable aerosol.
H229	Pressurized container: may burst if heated.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness
H411	Toxic to aquatic life with long lasting effects

This information, even if reliable, must be considered only approximate. We are not responsible for the wrong use of the product, or the violation of any license. Before using, the users should verify the suitability of the product for its specific use.