




XT-10. 10 Functions In 1. The Best of the Best (S159)

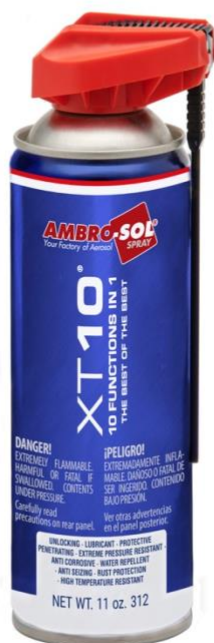

UNLOCKING: One of best Ambro-Sol products, XT-10 is a multipurpose lubricant with a strong unlocking power! Never be without XT-10, at home or in the shop.

PROTECTIVE: This product protects surfaces and materials from atmospheric agents, bad weather, dust and rust: thanks to XT-10 that won't be a problem. This Ambro-Sol spray has a strong protective power, and it's ideal for all surfaces and situations.

LUBRICANT: This Ambro-Sol spray has a strong lubricant power, and it's ideal for maintenance and lubrication of all surfaces and for all types of uses, at home and at work. A can't miss product to always have on hand.

PENETRATE: With XT-10 you have the guarantee of a strong penetrating spray. XT-10 spray acts on all types of surfaces, and it resolves the problem at the core.

EXTREME PRESSURE RESISTANT: Functional for everyday use. Strong enough for the toughest situations.

HIGH TEMPERATURE RESISTANT: XT-10 doesn't fear rivals. This amazing multipurpose spray has a great advantage, it resists hot temperature applications, and for that it's perfect to be used in welding, mechanical, electrical, and industry settings.

ANTI CORROSIVE: Are your materials under a corrosion process? Ambro-Sol has the solution for you! The XT-10 spray has a strong anti-corrosive power. Try it!!

WATER-REPELLENT: This product can repel water! XT-10 protects surfaces from water and from atmospheric conditions.

ANTI-SEIZE: XT-10 has a strong anti-seize power, and it's ideal for all type of materials: It penetrates and unblocks quickly and efficiently. XT-10 is ideal for professional use and great for everyday use at home.

RUST PROTECTION: Rust is the enemy of everyone. But with XT-10 the fight is simple and easy. This amazing multipurpose spray has a strong solvent power, dissolving rust but also other materials such as silicone, glue, adhesives, and paints.... Give XT-10 a try!



XT10 – XT-10 functions with a 360° dispensing valve: A Multi-Purpose Lubricant with 10 powerful functions - **lubricating, unlocking, penetrating, protective, extreme pressure resistant, high temperature resistant, anti-seizing, water repellent, rust protection**. Created with active ingredients of the highest quality, it has an ultra-lubricating, ultra-penetrating power. Perfectly suited for the workshop, at home, in the garden, in the nautical industry, industrial, sporting goods or anywhere there is a mechanism that requires maintenance.

CERTIFIED :

Test N° 14LA05748

E.P. Properties and anti-seize with “four ball tester”



INNOVHUB
STAZIONI SPERIMENTALI
PER L'INDUSTRIA



SSOG
STAZIONE SPERIMENTALE
PER LE INDUSTRIE DEGLI OLI E DEI GRASSI

Innovazione e ricerca

Technical Specifications:

Quantity	400 ml – Net Wt. 11 oz 312g
Barcode	EAN 13: 8034108893716
Case	12 pieces
Aspect	Cylinder containing under pressure fluid
Color	Straw yellow
Odor	Characteristic of solvent
Relative Density	at 68°F 0.76 ÷ 0.80 g/ml
Flash Point	Low. 32° F
Pressure at 68°F	3/5 bar
Vapor tension	0.5 hPa a 68°F
Viscosity	< 8 mm ² /s a 104°F
Solubility	Insoluble in water

STORAGE

Before using: Stock the product in a dry location above 32°F degrees and below 113°F. After use, keep containers closed. In the original package, the product can be conserved for 24 months.

After the first use: conserve in a fresh and dry location, away from hot conditions. Keep out of reach of children.

Hazards identification:

- H222** Extremely flammable aerosol.
- H229** Pressurised container: may burst if heated.
- H336** May cause drowsiness or dizziness.

This information, even if reliable, must be considered only approximate. We are not responsible for the wrong use of the product, or the violation of any license. Before using, the users should verify the suitability of the product for its specific use.

ASTM D 2783-03		
Test / Method	Un.measure	Result
Speed	laps/min	1760
Time of test	s	10
Engage load	kgf	50
Weld load	kgf	160
Load load / wear	kgf	30

ASTM D 4172-94		
Test / Method	Un.measure	Result
Speed	laps/min	1200
Time of test	min	60
Load / Charge	kgf	40
Temperature room	/	/
Diam. Medium Wear track	mm	0.86

